

GL159

PNP SILICON PLANAR HIGH CURRENT TRANSISTOR


Description

The GL159 is designed for general purpose switching and amplifier applications.

Features

- 5 Amps continuous current, up to 15Amps peak current
- Excellent gain characteristic specified up to 10Amps
- Very low saturation voltages

Package Dimensions

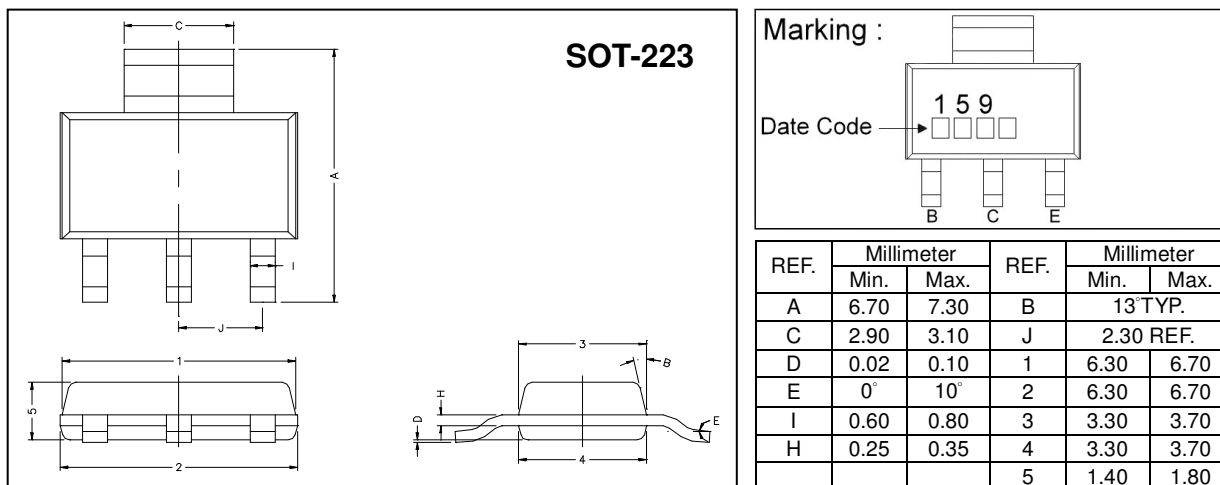

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Ratings	Unit
Junction Temperature	T _j	+150	°C
Storage Temperature	T _{stg}	-55~+150	°C
Collector to Base Voltage	V _{CB0}	-100	V
Collector to Emitter Voltage	V _{CEO}	-60	V
Emitter to Base Voltage	V _{EB0}	-6	V
Collector Current (DC)	I _c	-5	A
Collector Current (Pulse)	I _c	-15	A
Total Power Dissipation	P _D	3	W

*The power which can be dissipated assuming the device is mounted in a typical manner on a P.C.B. with copper equal to 4 square inch minimum.

Electrical Characteristics (Ta = 25°C, unless otherwise stated)


Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BV _{CB0}	-100	-	-	V	I _c =-100uA, I _E =0
*BV _{CEO}	-60	-	-	V	I _c =-10mA, I _B =0
BV _{EB0}	-6	-	-	V	I _E =-100uA, I _c =0
I _{CB0}	-	-	-50	nA	V _{CB} =-80V, I _E =0
I _{CES}	-	-	-50	nA	V _{CE} =-60V
I _{EB0}	-	-	-10	nA	V _{EB} =-6V, I _c =0
*V _{CE(sat)} 1	-	-20	-50	mV	I _c =-100mA, I _B =-10mA
*V _{CE(sat)} 2	-	-85	-140	mV	I _c =-1A, I _B =-100mA
*V _{CE(sat)} 3	-	-155	-210	mV	I _c =-2A, I _B =-200mA
*V _{CE(sat)} 4	-	-370	-460	mV	I _c =-5A, I _B =-500mA
*V _{BE(sat)}	-	-1.08	-1.24	V	I _c =-5A, I _B =-500mA
*V _{BE(on)}	-	-0.935	-1.07	V	V _{CE} =-1V, I _c =-5A
*h _{FE1}	100	200			V _{CE} =-1V, I _c =-10mA
*h _{FE2}	100	200	300		V _{CE} =-1V, I _c =-2A
*h _{FE3}	75	90			V _{CE} =-1V, I _c =-5A
*h _{FE4}	10	25			V _{CE} =-1V, I _c =-10A
f _T	-	120	-	MHz	V _{CE} =-10V, I _c =-100mA, f=50MHz

Cob	-	74	-	pF	$V_{CB}=-10V, I_E=0, f=1MHz$
ton	-	82	-	ns	$V_{CC}=-10V, I_C=-2A, I_{B1}=I_{B2}=-200mA$
toff	-	350	-		

*Measured under pulse condition. Pulse width $\leq 300\mu s$, Duty Cycle $\leq 2\%$

Spice parameter data is available upon request for this device.

Characteristics Curve

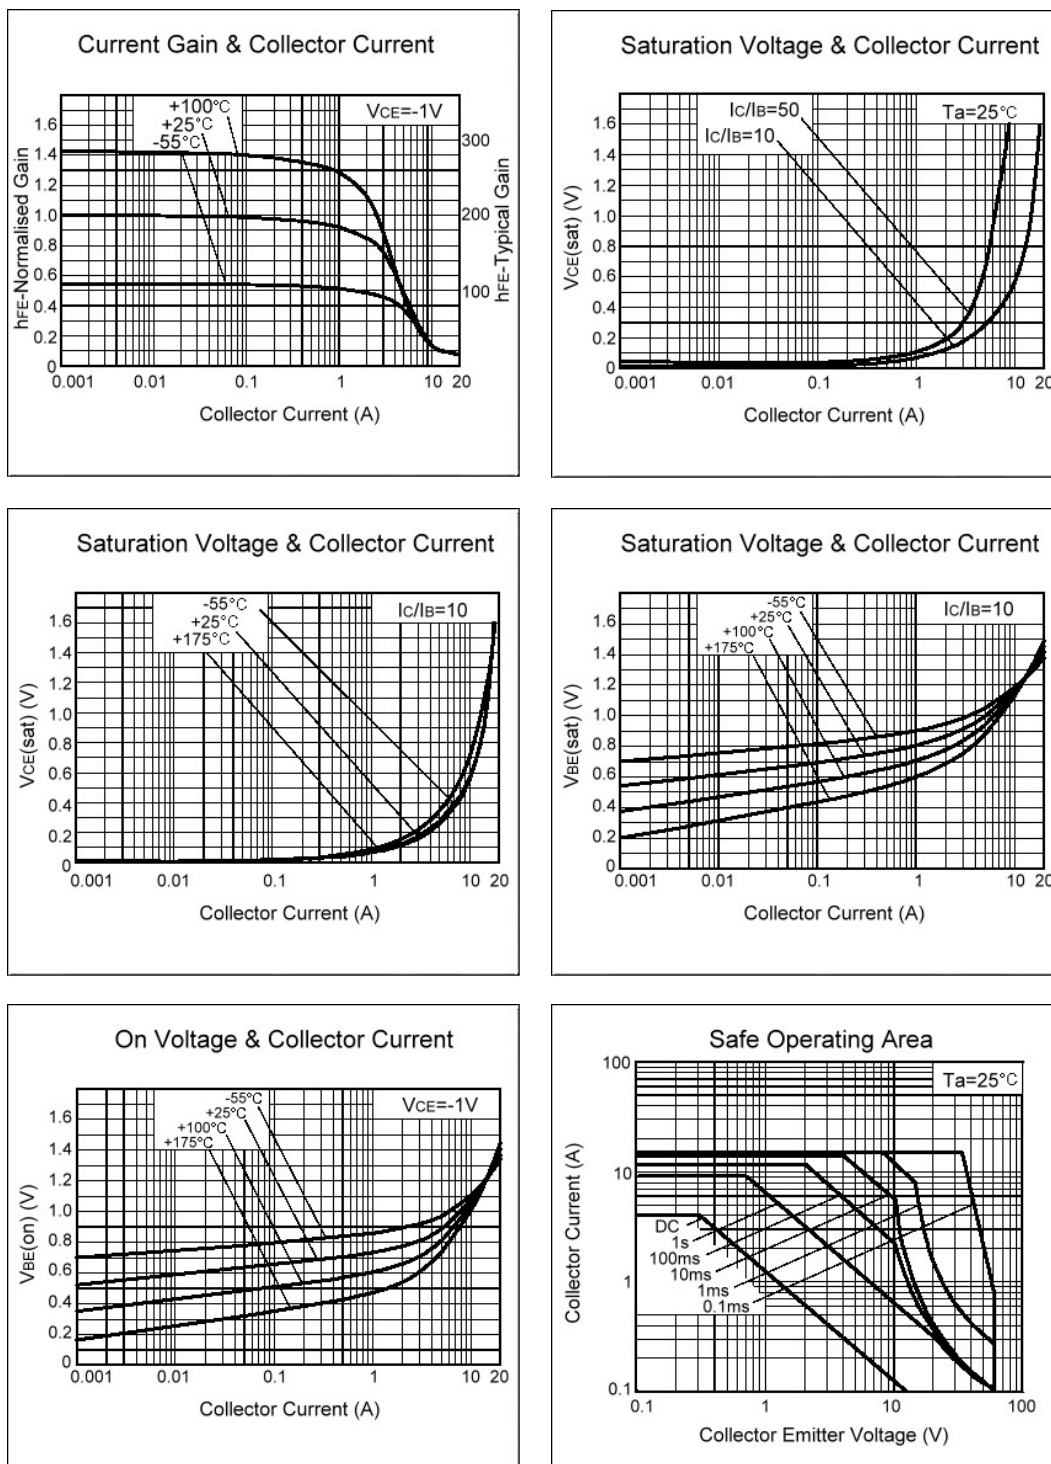

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
- TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
- TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165