

GL194

NPN SILICON PLANAR MEDIUM POWER TRANSISTOR



Description

The GL194 is designed for medium power amplifier applications.

Features

- 60 Volt V_{CEO}
- 1 Amp continuous current
- Complementary to GL195

Package Dimensions

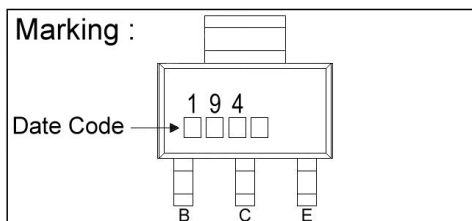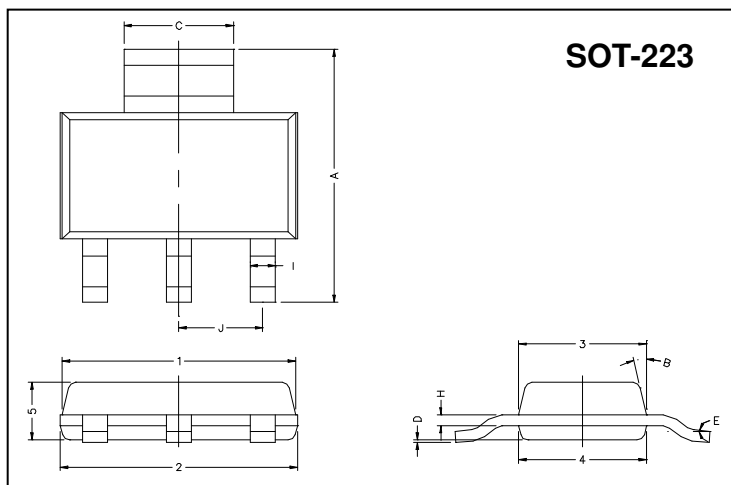

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	6.70	7.30	B	13°TYP.	
C	2.90	3.10	J	2.30 REF.	
D	0.02	0.10	1	6.30	6.70
E	0°	10°	2	6.30	6.70
I	0.60	0.80	3	3.30	3.70
H	0.25	0.35	4	3.30	3.70
			5	1.40	1.80

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$


Parameter	Symbol	Ratings	Unit
Junction Temperature	T_j	+150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55~+150	$^\circ\text{C}$
Collector to Base Voltage	V_{CB0}	80	V
Collector to Emitter Voltage	V_{CE0}	60	V
Emitter to Base Voltage	V_{EB0}	5	V
Collector Current (DC)	I_c	1	A
Collector Current (Pulse)	I_c	2	A
Base Current	I_B	200	mA
Total Power Dissipation	P_D	2	W

Electrical Characteristics ($T_a = 25^\circ\text{C}$, unless otherwise stated)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BV_{CB0}	80	-	-	V	$I_c=100\mu\text{A}$, $I_E=0$
$*BV_{CE0}$	60	-	-	V	$I_c=10\text{mA}$, $I_B=0$
BV_{EB0}	5	-	-	V	$I_E=100\mu\text{A}$, $I_c=0$
I_{CB0}	-	-	100	nA	$V_{CB}=60\text{V}$, $I_E=0$
I_{CES}	-	-	100	nA	$V_{CES}=60\text{V}$
I_{EBO}	-	-	100	nA	$V_{EB}=4\text{V}$, $I_c=0$
$*V_{CE(sat)1}$	-	-	0.25	V	$I_c=500\text{mA}$, $I_B=50\text{mA}$
$*V_{CE(sat)2}$	-	-	0.5	V	$I_c=1\text{A}$, $I_B=100\text{mA}$
$*V_{BE(sat)}$	-	-	1.1	V	$I_c=1\text{A}$, $I_B=100\text{mA}$
$*V_{BE(on)}$	-	-	1.0	V	$V_{CE}=5\text{V}$, $I_c=1\text{A}$
$*h_{FE1}$	100	-	-		$V_{CE}=5\text{V}$, $I_c=1\text{mA}$
$*h_{FE2}$	100	-	300		$V_{CE}=5\text{V}$, $I_c=500\text{mA}$
$*h_{FE3}$	80	-	-		$V_{CE}=5\text{V}$, $I_c=1\text{A}$
$*h_{FE4}$	30	-	-		$V_{CE}=5\text{V}$, $I_c=2\text{A}$
f_T	150	-	-	MHz	$V_{CE}=10\text{V}$, $I_c=50\text{mA}$, $f=100\text{MHz}$
C_{ob}	-	-	10	pF	$V_{CB}=10\text{V}$, $I_E=0$, $f=1\text{MHz}$

*Measured under pulse condition. Pulse width=300 μs , Duty Cycle $\leq 2\%$

Characteristics Curve

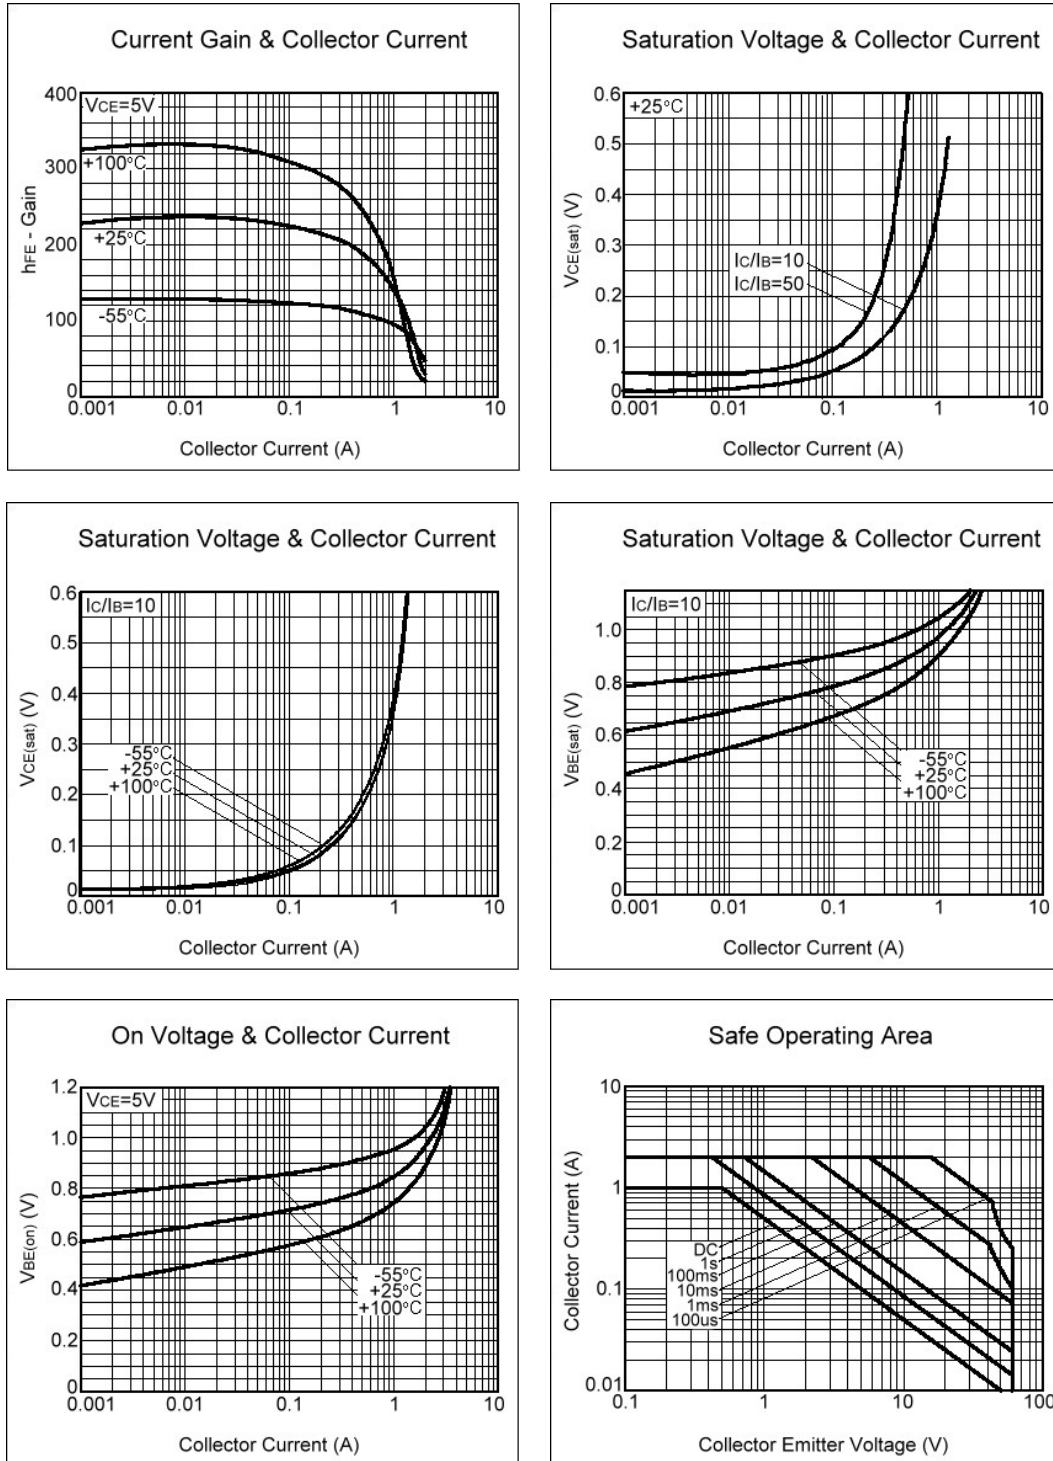

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
- TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
- TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165