

GMBT1036

PNP SILICON PLANAR MEDIUM POWER TRANSISTOR


Description

The GMBT1036 is designed for medium power amplifier applications.


Features

- $I_{CMax} = -500mA$
- Low $V_{CE(sat)}$. Optimal for low voltage operation.
- Complementary to GMBT2411

Package Dimensions

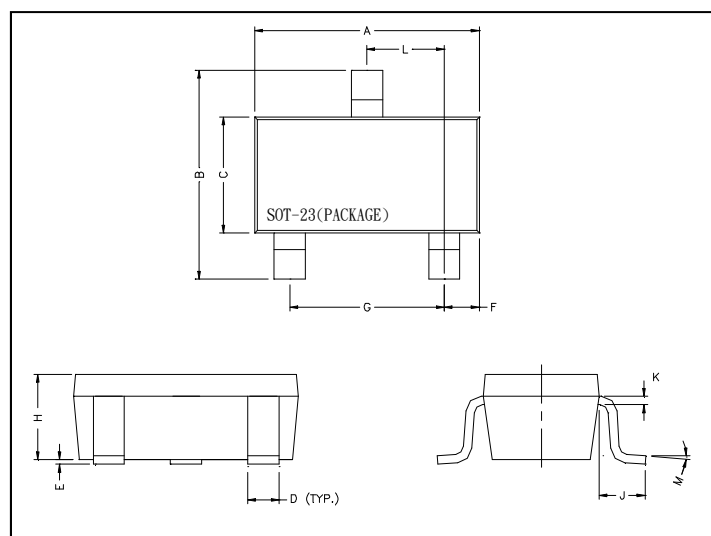

Marking :



REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.70	3.10	G	1.90	REF.
B	2.40	2.80	H	1.00	1.30
C	1.40	1.60	K	0.10	0.20
D	0.35	0.50	J	0.40	-
E	0	0.10	L	0.85	1.15
F	0.45	0.55	M	0°	10°

Absolute Maximum Ratings at $T_a = 25^\circ C$

Parameter	Symbol	Ratings	Unit
Junction Temperature	T_j	+150	$^\circ C$
Storage Temperature	T_{stg}	-55~+150	$^\circ C$
Collector to Base Voltage	V_{CB0}	-40	V
Collector to Emitter Voltage	V_{CE0}	-32	V
Emitter to Base Voltage	V_{EB0}	-5	V
Collector Current	I_C	-500	mA
Total Power Dissipation	P_D	225	mW

Electrical Characteristics ($T_a = 25^\circ C$, unless otherwise stated)


Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BV_{CB0}	-40	-	-	V	$I_C = -100\mu A$, $I_E = 0$
BV_{CE0}	-32	-	-	V	$I_C = -1mA$, $I_B = 0$
BV_{EB0}	-5	-	-	V	$I_E = -100\mu A$, $I_C = 0$
I_{CB0}	-	-	-1	μA	$V_{CB} = -20V$, $I_E = 0$
I_{EB0}	-	-	-1	μA	$V_{EB} = -4V$, $I_C = 0$
* $V_{CE(sat)}$	-	-	-400	mV	$I_C = -100mA$, $I_B = -10mA$
* h_{FE}	82	-	390		$V_{CE} = -3V$, $I_C = -10mA$
f_T	-	200	-	MHz	$V_{CE} = -5V$, $I_E = 20mA$, $f = 100MHz$
C_{ob}	-	7	-	pF	$V_{CB} = -10V$, $I_E = 0$, $f = 1MHz$

*Measured under pulse condition. Pulse width=300 μs , Duty Cycle $\leq$ 2%

Classification Of h_{FE}

Rank	HP	HQ	HR
Range	82 - 180	120 - 270	180 - 390

Characteristics Curve

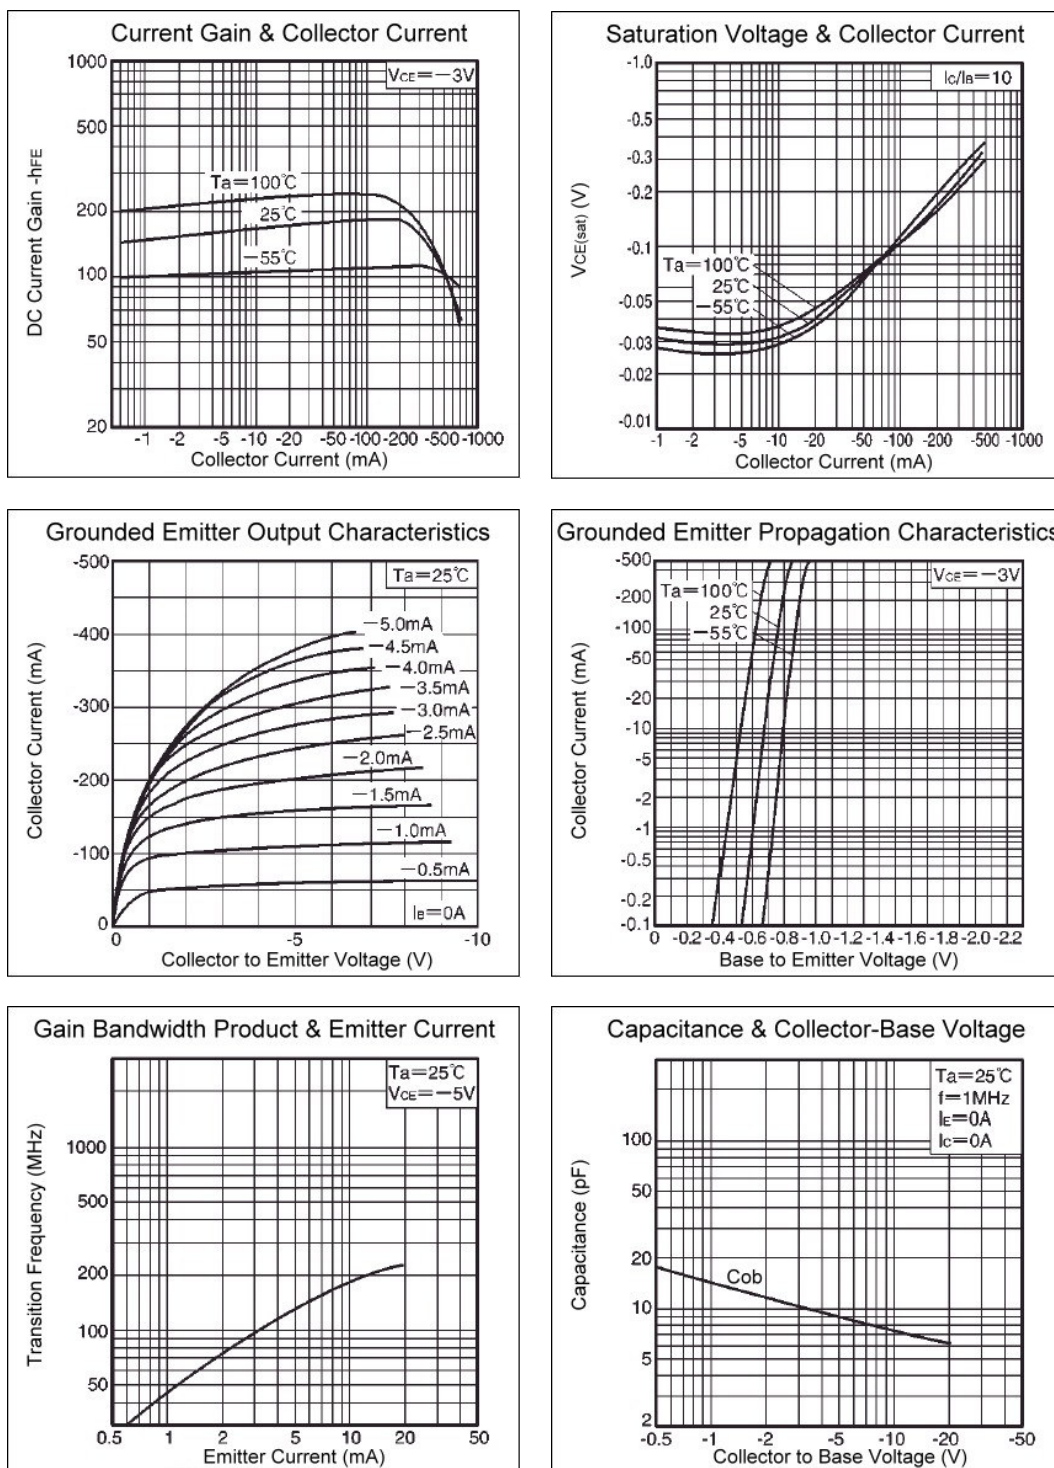

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165