


GMBT8550

PNP EPITAXIAL TRANSISTOR

Description

The GMBT8550 is designed for general purpose amplifier applications.

Package Dimensions

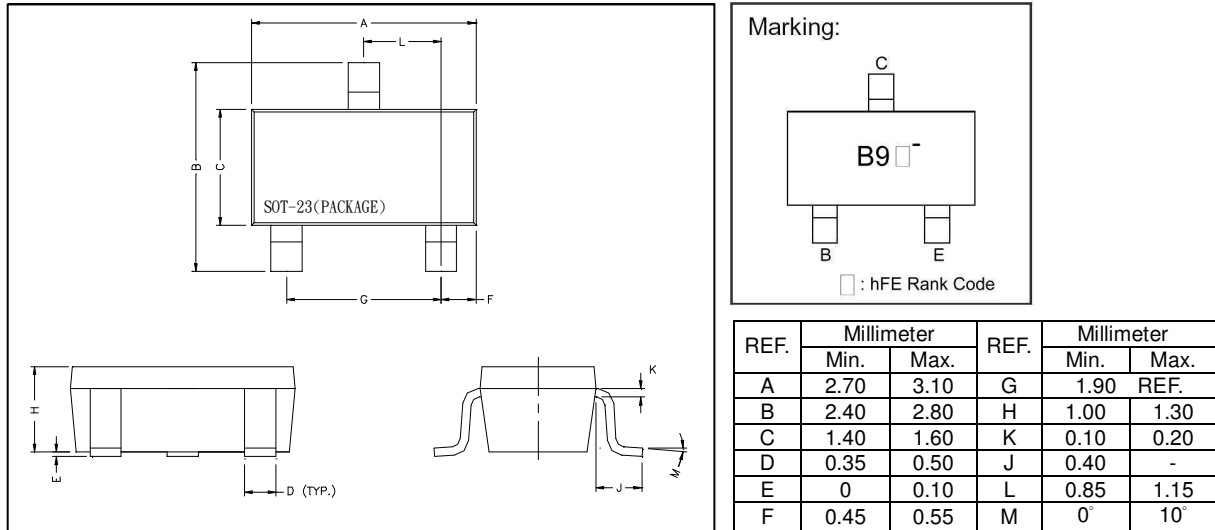

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Ratings	Unit
Junction Temperature	Tj	+150	°C
Storage Temperature	Tstg	-55 ~ +150	°C
Collector to Base Voltage	VCBO	-25	V
Collector to Emitter Voltage	VCEO	-20	V
Emitter to Base Voltage	VEBO	-5	V
Collector Current	IC	-700	mA
Total Power Dissipation	PD	225	mW


Characteristics at Ta = 25°C

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BVCBO	-25	-	-	V	IC=-10uA
BVCEO	-20	-	-	V	IC=-1mA
BVEBO	-5	-	-	V	IE=-10uA
ICBO	-	-	-1	uA	VCB=-20V
IEBO	-	-	-100	nA	VEB=-6V
VCE(sat)	-	-	-500	mV	IC=-500mA, IB=-50mA
VBE(on)	-	-	-1	V	VCE=-1V, IC=-150mA
hFE	100	-	500		VCE=-1V, IC=-150mA
fT	150	-	-	MHz	VCE=-10V, IC=-20mA, f=100MHz
Cob	-	-	10	pF	VCB=-10V, f=1MHz

Classification Of hFE

Rank	B9C	B9D	B9E
hFE	100 - 200	150 - 300	250 - 500

Characteristics Curve

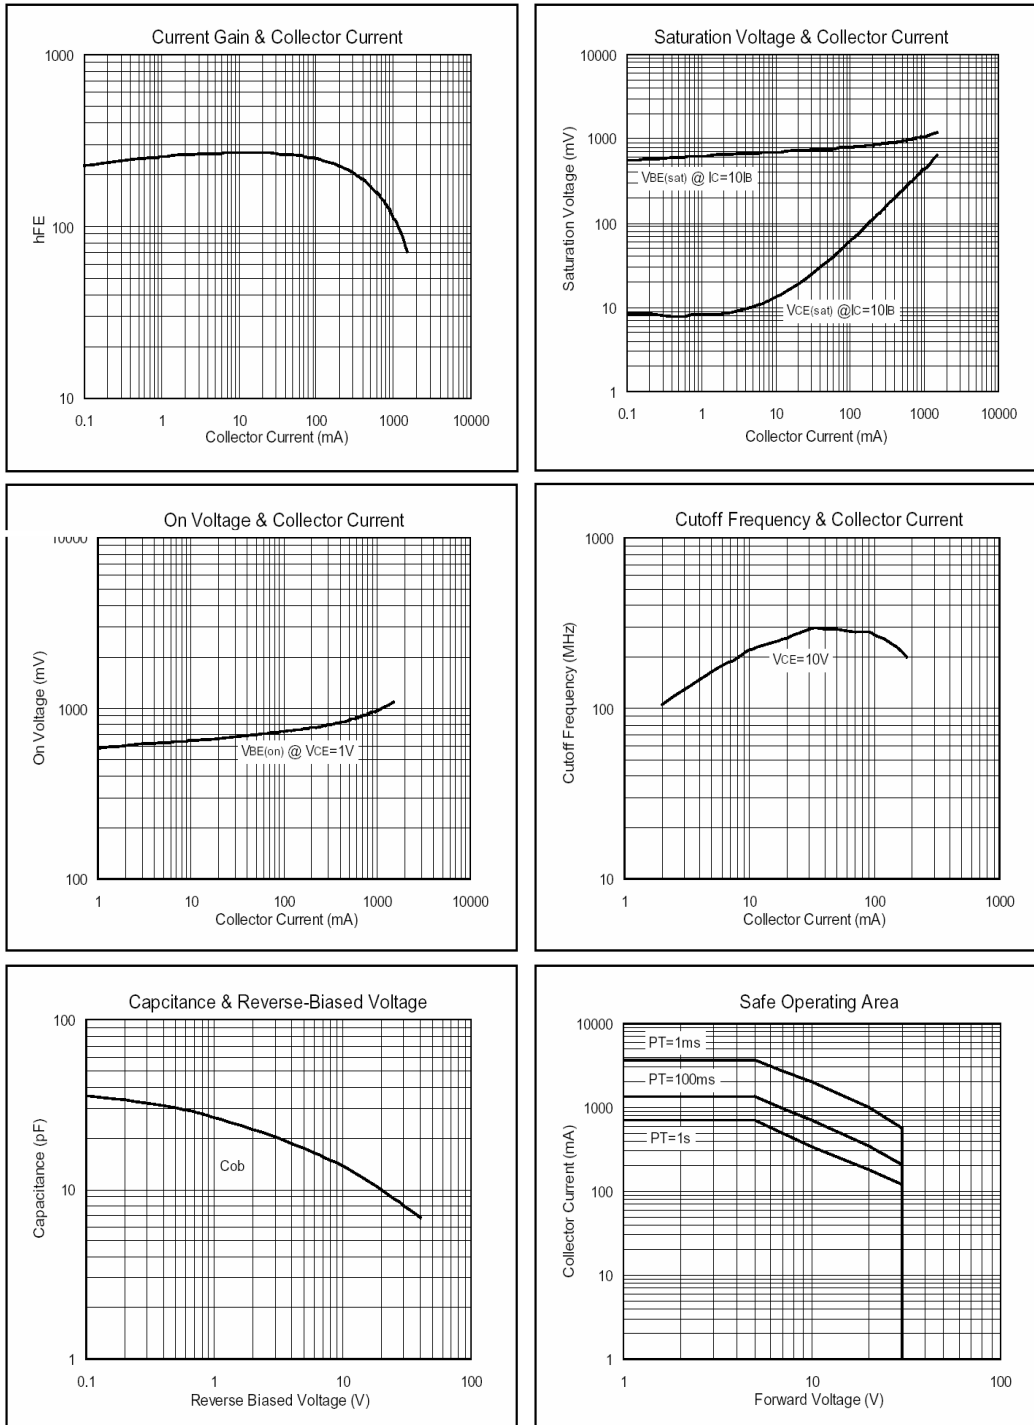

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165