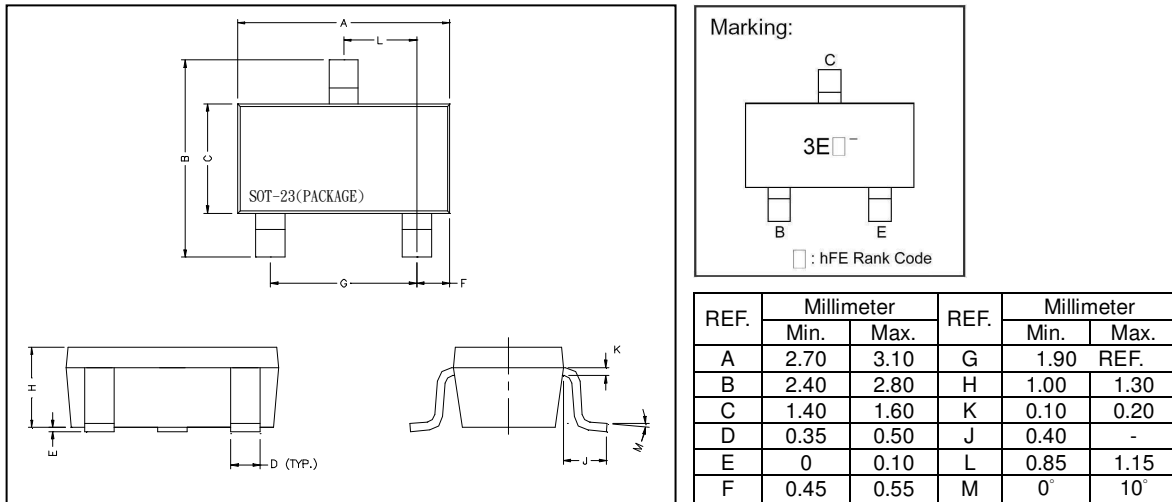


GMBT9018**NPN EPITAXIAL TRANSISTOR****Description**

The GSMBT9018 is designed for use in AM/FM amplifier and local oscillator of FM/VHF tuner.

Package Dimensions**Absolute Maximum Ratings at Ta = 25°C**

Parameter	Symbol	Ratings	Unit
Junction Temperature	Tj	+150	°C
Storage Temperature	Tstg	-55 ~ +150	°C
Collector to Base Voltage	VCBO	30	V
Collector to Emitter Voltage	VCEO	15	V
Emitter to Base Voltage	VEBO	5	V
Collector Current	IC	50	mA
Total Power Dissipation	PD	225	mW

Characteristics at Ta = 25°C






Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BVCBO	30	-	-	V	IC=100uA, IE=0
BVCEO	15	-	-	V	IC=1mA, IB=0
BVEBO	5	-	-	V	IE=100uA, IC=0
ICBO	-	-	50	nA	VCB=12V, IE=0
*VCE(sat)	-	-	0.5	V	IC=10mA, IB=1mA
*hFE	39	-	198		VCE=5V, IC=1mA
fT	700	1100	-	MHz	VCE=5V, IC=5mA
Cob	-	1.3	1.7	pF	VCB=10V, IE=0

* Pulse Test: Pulse Width ≤ 380μs, Duty Cycle ≤ 2%

Classification Of hFE

Rank	E	F	G	H	I
Range	39-60	54-80	72-108	97-146	132-198

Characteristics Curve

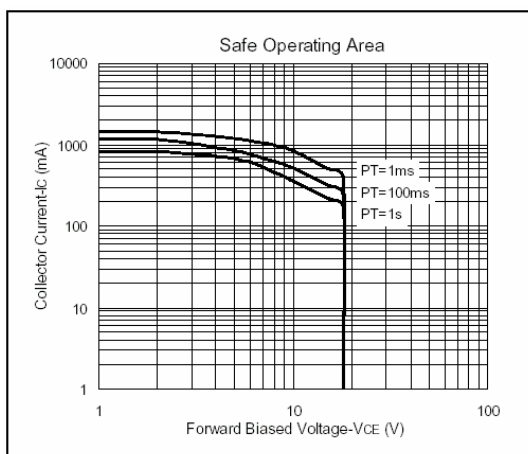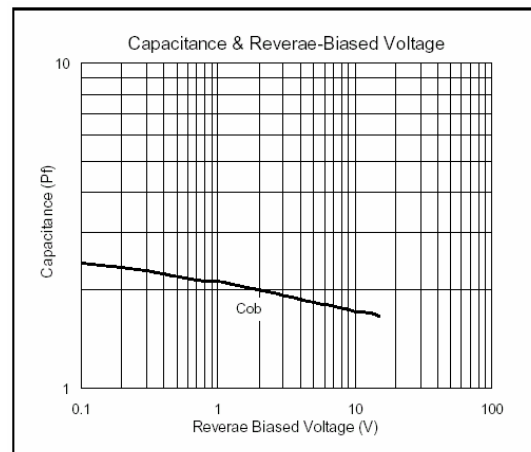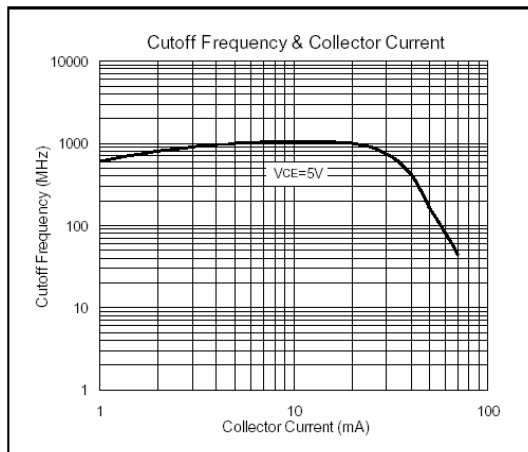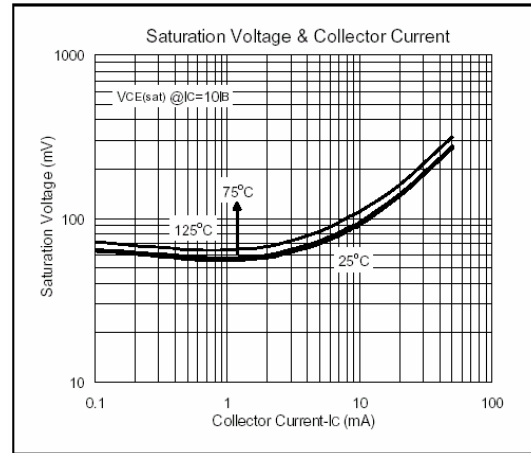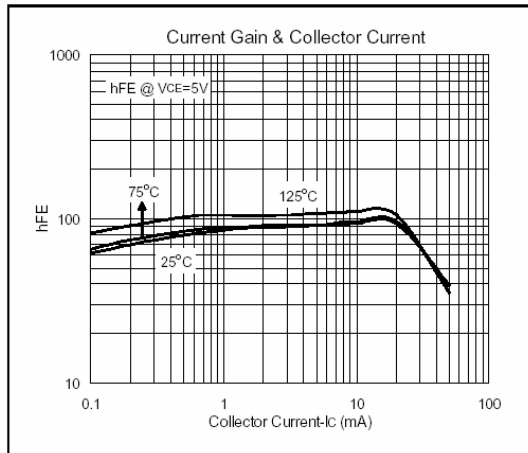

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165