


GM3019

NPN EPITAXIAL PLANAR TRANSISTOR


Description

The GM3019 is designed for general purpose amplifier applications and switching requiring collector currents 1A.

Package Dimensions

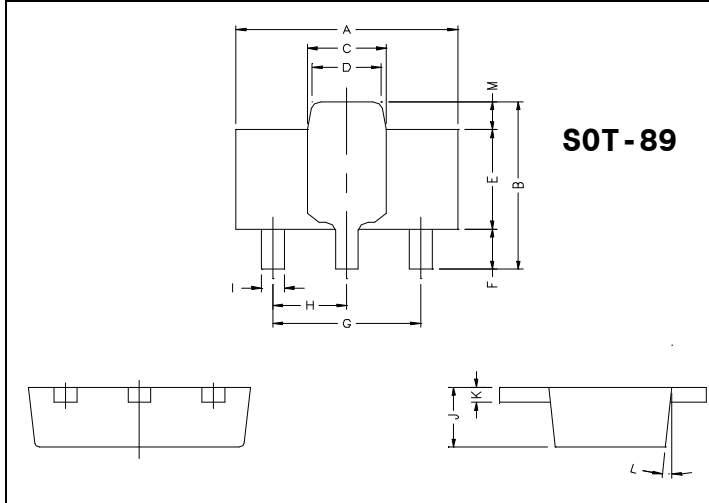

Marking :

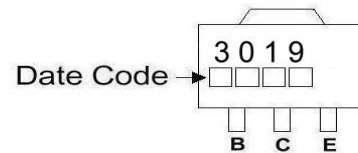

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	4.4	4.6	G	3.00	REF.
B	4.05	4.25	H	1.50	REF.
C	1.50	1.70	I	0.40	0.52
D	1.30	1.50	J	1.40	1.60
E	2.40	2.60	K	0.35	0.41
F	0.89	1.20	L	5° TYP.	
			M	0.70 REF.	

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Ratings	Unit
Junction Temperature	Tj	+150	°C
Storage Temperature	Tstg	-55 ~ +150	°C
Collector to Base Voltage	VCBO	140	V
Collector to Emitter Voltage	VCEO	80	V
Emitter to Base Voltage	VEBO	7	V
Collector Current	IC	1	A
Total Power Dissipation	PD	1	W

Characteristics at Ta = 25°C

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BVCBO	140	-	-	V	IC=100uA, IE=0
BVCEO	80	-	-	V	IC=30mA, IB=0
BVEBO	7	-	-	V	IE=100uA, IC=0
ICBO	-	-	50	nA	VCB=90V
IEBO	-	-	50	nA	VBE=5V
VCE(sat)	-	-	200	mV	IC=150mA, IB=15mA
VBE(sat)	-	-	1.1	V	IC=150mA, IB=15mA
hfe1	50	-	-		VCE=10V, IC=0.1mA
hfe2	90	-	-		VCE=10V, IC=10mA
hfe3	100	-	300		VCE=10V, IC=150mA
hfe4	50	-	-		VCE=10V, IC=500mA
hfe5	15	-	-		VCE=10V, IC=1000mA
Cob	-	-	12	pF	VCB=10V, IE=0V, f=1MHz
fT	100	-	-	MHz	VCE=50V, IC=50mA, f=100MHz

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165